

The effective technology and complex services



PRODUCT RANGE

FARMET AGRICULTURAL MACHINERY



TILLAGE




FERTILISER APPLICATION



SOWING



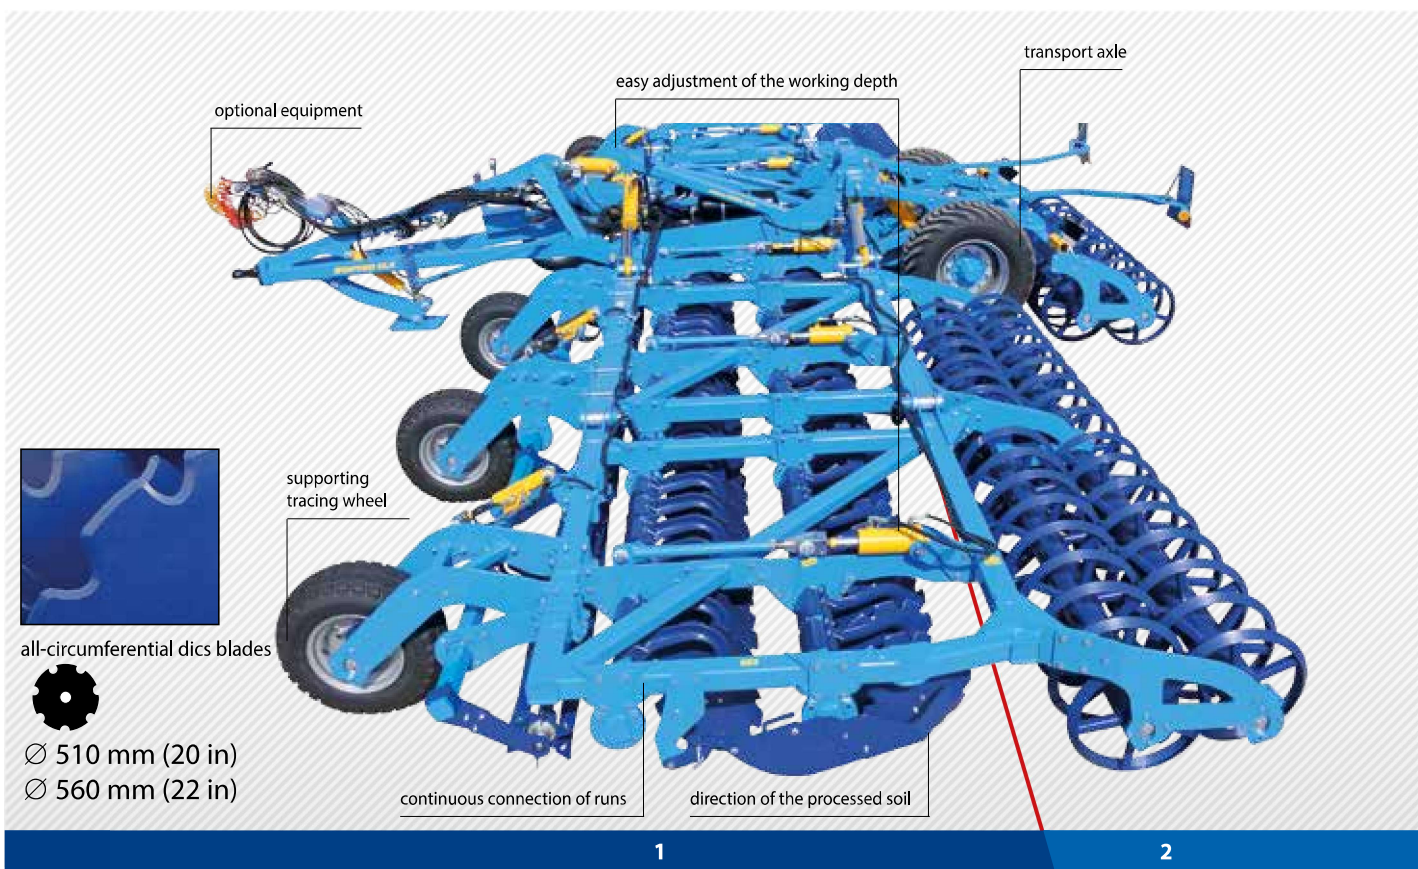

1. Disks with the diameter of 510 mm / 560 mm located in two rows undercut the soil. Working depth is 3,5–12 cm.
2. Clods are crumbled by the rear roller. (Optional rollers, page 39).

| Technical parameters | Units | Softer 1050 PRO | Softer 1250 PRO |
|------------------------|----------------|----------------------|-----------------------|
| Working width | mm / ft | 10250 / 33.6 | 12250 |
| Transport width | mm / ft | 3000 / 9.8 | 3000 |
| Transport height | mm / ft | 3500 / 11.5 | 4000 |
| Total machine length | mm / ft | 8150 / 26.7 | 8200 |
| Working depth | mm in | 35–120 1.5–4.5 | 35–120 1.5–4.5 |
| Number of ploughshares | pcs | 84 | 101 |
| Working performance | ha/h (ac/h) | 10,2–15 (25.2–37) | 12,3–18,4 (30.3–45.3) |
| Towing vehicle | kW HP | 225–375 305–510 | 300–450 400–600 |
| Machine weight | kg / lb. | 11000 / 24255 | 13000 / 28665 |

More info at www.farmet.eu

